American Standard

CADET ELITE™ CORNER
WHIRLPOOLS BY AMERICAN STANDARD
HIGH GLOSS ACRYLIC

CADET ELITE™ CORNER WHIRLPOOL

Comfortable two person design with dual back support positions, molded-in armrests and generous faucet deck area.

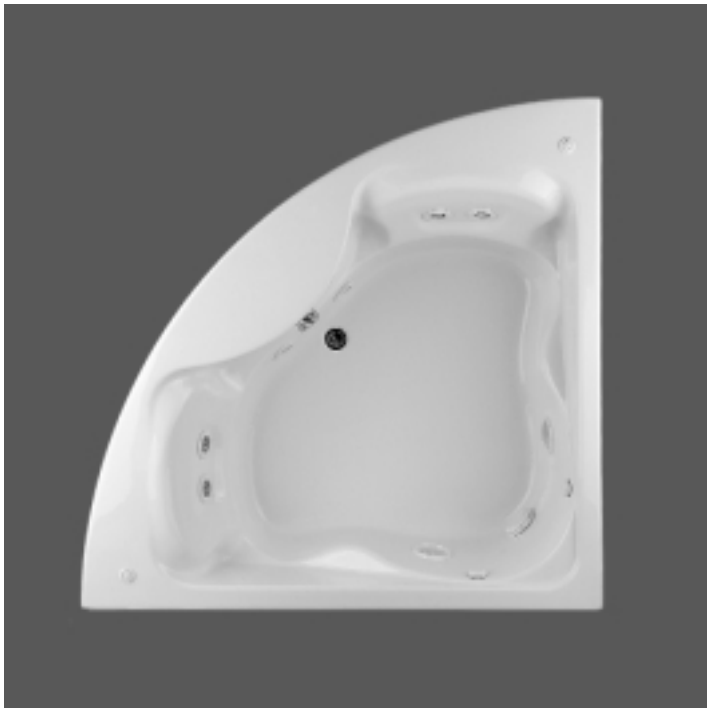

❑ **2775E (specify White 020, Bone 021, or Linen 222)**
- Acrylic with fiberglass reinforcement
- 2.0 HP self-draining pump/motor with dry run seal
- Eight multi-directional and flow adjustable jets including:
  Two high performance Ideal-flow™ Jets
  Six interchangeable Flex-jets™
- Two silent air volume controls
- Deck-mounted On/Off control
- Complete factory installed and tested whirlpool system

❑ **2775EC (specify White 020, Bone 021, or Linen 222)**
- Same as above with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

Nominal Dimensions: 60” x 60” x 19-3/4" (1524 x 1524 x 502mm)

Installed Size: 85” x 60” x 19-3/4" (2159 x 1524 x 502mm)

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Components Needed:

❑ Bath Filler*: (specify finish)

❑ Bath Drain: BATH-DRAIN (specify Chrome 002, Polished Brass 099, or Satin 295)

Custom Accessories Available:

❑ Pulse Jet Kit: PULSE-JET (two per kit, specify White 020, Bone 021, or Linen 222)

❑ Soft Jet Kit: SOFT-JET (two per kit, specify White 020, Bone 021, or Linen 222)

❑ E-Z-Install™ Whirlpool Heater - EZHEAT-100

❑ Tile Bead Kit: TILE-BEAD

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

* See American Standard Faucet Selector

© 2003 American Standard Inc.

American Standard

CADET ELITE™ CORNER
WHIRLPOOLS BY AMERICAN STANDARD
HIGH GLOSS ACRYLIC

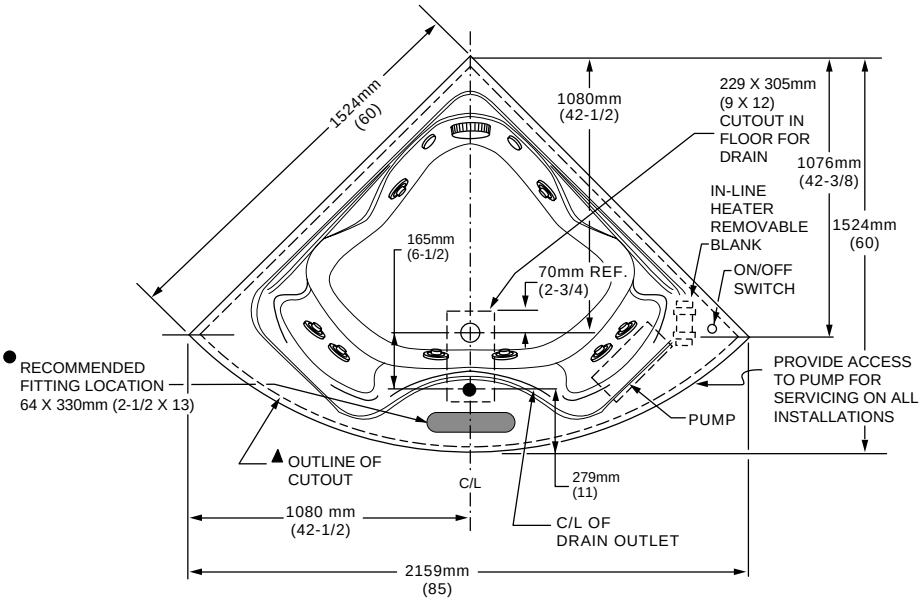

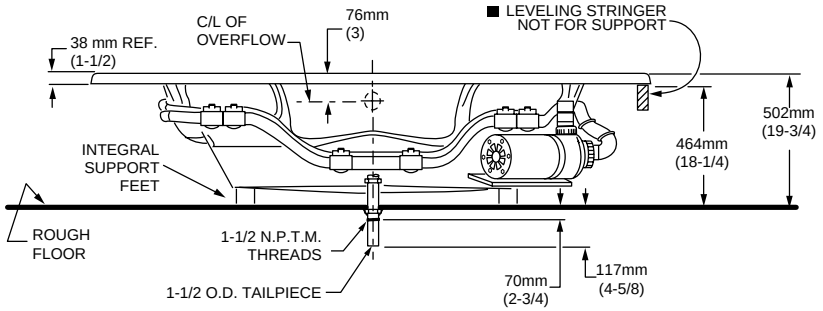

GENERAL SPECIFICATIONS FOR 2775E WHIRLPOOL	
INSTALLED SIZE	85 X 60 X 19-3/4In. (2159mm X 1524 mm X 502mm)
WEIGHT	130 Lbs. (59 Kg.)
WEIGHT w/WATER	756 Lbs. (343 Kg.)
GAL. TO OVERFLOW	75 Gal. (284 L.)
MIN. OPERATING GAL.	60 Gal. (227 L.)
BATHING WELL AT SUMP	32 X 32 In. (813 mm X 813 mm)
BATHING WELL AT RIM	46 X 46 In. (1168 X 1168mm)
WATER DEPTH TO OVERFLOW	14 In. (356 mm)
FLOOR LOADING	34 Lbs./Sq. Ft. (115 Kgs/Sq. m.)
(PROJECTED AREA)	
PTS.	41.7
CUBE (FT^3)	70.4
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	2.1 HP, 14.4 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

■ OPTIONAL 2 WALL TILING BEAD KIT No. TILE-BEAD AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT:
Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1/A112.19.7M.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

© 2003 American Standard Inc.